




Beautiful Made Easy



aquas  
Waterproof Laminate Flooring



## About


# Waterproof Laminates

Prime Floors introduces Aquas - A smart flooring solution for classy living. Waterproof laminate flooring is a popular choice for both residential and commercial spaces due to its durability and resistance to moisture.

Unlike traditional laminate flooring, which can be damaged by water, waterproof laminate is designed to resist moisture. This makes it suitable for areas prone to spills or high humidity.

Waterproof laminate comes in various colors, and finishes. You can find options that mimic the look of hardwood allowing you to achieve the desired aesthetic without the maintenance concerns associated with natural materials.

## composition layers

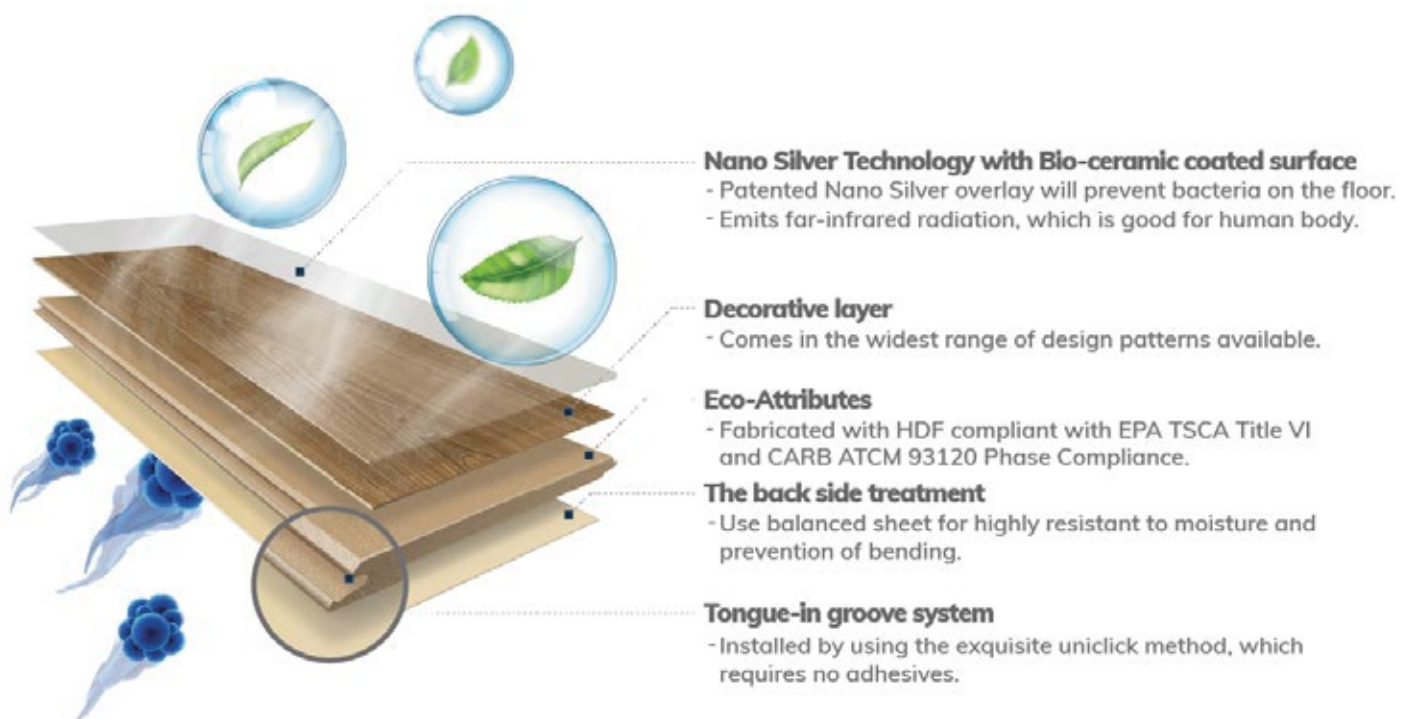





**MOCHA TOUCH | AQ-7001**

Size: 7.5" x 47.6"

Qty: 10 pcs / Carton

Coverage: 24.8 sqft





**HAZEL FREEZE | AQ-7002**

Size: 7.5" x 47.6"

Qty: 10 pcs / Carton

Coverage: 24.8 sqft



**COCONUTTY I AQ-7003**

Size: 7.5" x 47.6"

Qty: 10 pcs / Carton

Coverage: 24.8 sqft





**NATURAL BEIGE | AQ-7004**

Size: 7.5" x 47.6"

Qty: 10 pcs / Carton

Coverage: 24.8 sqft



**METROPOLIS GREY | AQ-7005**

Size: 7.5" x 47.6"

Qty: 10 pcs / Carton

Coverage: 24.8 sqft





**WARM PEACH | AQ-7006**

Size: 7.5" x 47.6"

Qty: 10 pcs / Carton


Coverage: 24.8 sqft



# UNIQUE FEATURES



Waterproof



AC4



Stain Resistant

**UNICLIC**®  
Patented Technology

## TECHNICAL SPECIFICATIONS

Item		Test Method	Spec
Dimension Tolerances	Length	EN 13329	≤ 0.2 mm
	Width	EN 13329	≤ 0.2 mm
	Thickness	EN 13329	≤ 0.2 mm
	Squareness	EN 13329	≤ 0.2 mm
	Straightness	EN 13329	≤ 0.3 mm
	Openings	EN 13329	≤ 0.15 mm
	Depth Difference	EN 13329	≤ 0.15 mm
	Fw concave	EN 13329	≤ 0.15 %
	Fw convex	EN 13329	≤ 0.2 %
	Fl concave	EN 13329	≤ 0.5 %
	Fl convex	EN 13329	≤ 1 %
Dimensional Variations	δl	EN 13329	≤ 0,9 mm
	δw	EN 13329	≤ 0,9 mm
Impact resistance	Big Ball	EN 13329	≥ 750 mm
	Small Ball	EN 13329	≥ 8 N
Abrasion Reistance		EN 13329	≥ 2000 cycles
Surface soundness		EN 13329	≥ 1.0 N/mm <sup>2</sup>
Static Indentation		ISO 24343-1	≤ 0.5 mm
Light Resistance		ISO 4892 - 2	Meets and/or Exceeds Class 4
Classification		ISO 10874	Meets and/or Exceeds Class 23/31
Castor Chair		EN 425	≥ 25.000 cycles
Edge Thickness swelling		ISO 24336	≤ 15 %
Locking strength	Length	ISO 24334	≥ 1.0 kN/m
	Width	ISO 24334	≥ 2.0 kN/m
Formaldehyde Emission		EN ISO 12460-5	≤ 98 mg/30g



Beautiful Made Easy



[www.excelwallpapers.com](http://www.excelwallpapers.com)