



# VINYL FLOORING

*Garnet-NX*



[www.solutiaindia.com](http://www.solutiaindia.com)




20611



20822



20631

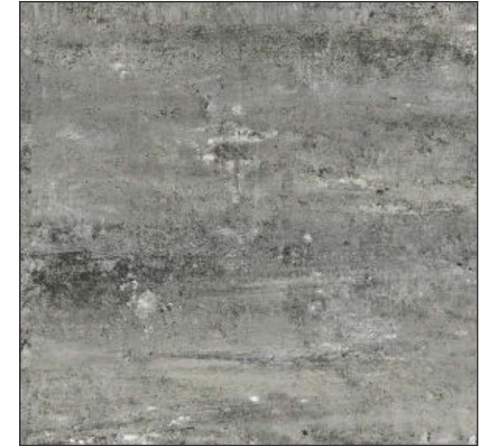

20542



20541



20632



20821

20611

Solutia®



20822

Solutia®



20631

Solutia®



20542

Solutia®



20541

Solutia®



20632

Solutia®





20821

Solutia®



# TECHNICAL SPECIFICATION

Item	Norm	Test Result
Total thickness	ASTM F-386 EN 428	2 MM
Wear Layer thickness	ASTM F-410 EN 429	0.2 MM
Performance	EN 685	31
Surface treatment	UV Treatment	Yes
Resistance to slip	ASTM C-1028 DIN 51130	R9
Abrasion Resistance	ASTM D-3384 EN 660-2	>10000 Class T
Residual indentation	ASTM F-1914 EN 433	0.02 MM
Dimensional Stability	ASTM F-1303 EN 434	<0.1 %
Thickness	ASTM F-386	+/- 0.005 INCH
Castor Chair	EN-425	Pass
Resistance to Chemicals	ASTM F-925 DIN 51958 EN 423	Index: 0 Not
Color Fastness To Light	ASTM F-1515 ISO 105-B02	6
Impact Sound	DIN 51120	4dB
Formaldehyde HCHO	EN 717-1	Pass
Behavior To Fire	ASTM E-648 ASTM E-84 EN 13501-1	Bfl-S1
Low Smoke	ASTM E-662	Q1
Toxic	ASTM F-963 EN 71 Part 3	Pass
Electrostatic charge	EN 1401	Antistatic
Indoor Air Quality	Floor score	Antistatic
Static load limit	ASTM F 970	1000psi


# Channel Partners



Mumbai



Maharashtra



Delhi



Gujarat




Chandigarh



Karnataka



Kolkata



Andhra & Telangana



Madhya Pradesh



Kerala



Tamilnadu